


TECHNICAL SPECIFICATIONS

HS2000

Heat Input:	2,1kW
Heat Output:	1.9kW
Voltage:	12V or 24V versions
Current Consumption:	1.4A continuous running
Air Throughput:	60 C.F.M.
Fuel:	Butane or Propane Gas

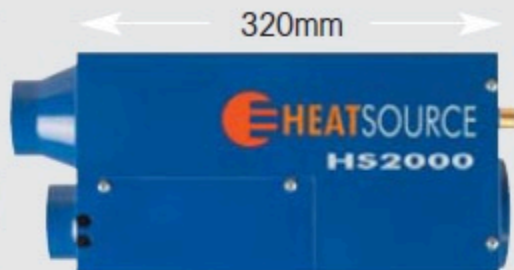

HS2800

Heat Input:	3.0kW
Heat Output:	2.8kW
Voltage:	12V or 24V versions
Current Consumption:	1.9A continuous running
Air Throughput:	85 C.F.M.
Fuel:	Butane or Propane Gas

